

Sanicondens Pro



4.5 m
50 m




See page 10

PRODUCT BENEFITS

- Compact and quiet solution
- Suitable for use with gas and oil boilers (using Sanineutral or Sanineutral Mini), floor and wall mounted boilers, refrigerated display cabinets, air conditioning units and dehumidifiers
- Easy installation, complete kit included

CONNECTIONS

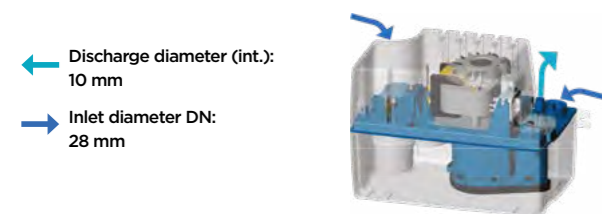


PACK CONTAINS

Sanicondens Pro, non-return valve included, fixing screw, 1 inlet adapter, 1 outlet adapter (Ø 50 mm), 1 drain hose (5m), 1 power cable 1.5 m, 1 rubber stopper, 1 alarm pre-connection cable

CURVE

Discharge height (m)

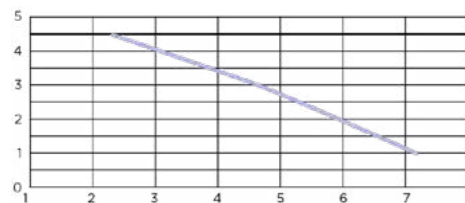


Flow rate (l/min)

TECHNICAL FEATURES

Max. power of boiler	Oil 30, Gas 50 kW
Number of inlets	2
Inlet diameter DN	28 mm
Discharge diameter (int.)	10 mm
Tank volume	2.2 L
Max. incoming temperature	80°C (S3 15%)
Voltage - Frequency	220-240 V - 50-60 Hz
Max. power consumption	60 W
Maximum current	0.52 A
Electrical class	I
IP rating	IP24
Noise level	< 45 dB(A)
Identification and logistics	
Gross weight	3 kg
Barcode	3308815083674
Product code	1140

DIMENSIONS

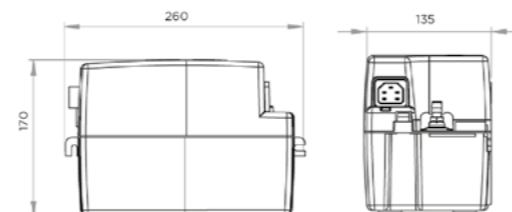

Dimensions (mm)

